

FEATURES

- 2 isolate & 1 vent valves (plugged vent provided)

APPLICATION

- Isolation & venting of gauges, switches & transmitters
- High pressure line shut off
- Liquid & gas services

Direct / Remote Mounting




STANDARD SPECIFICATIONS

Mounting	:	Direct
Pattern	:	1
Wetted parts	:	AISI 316 SS
Instrument connection	:	1/2" NPT (F) x 2 Nos.
Stem packing	:	PTFE
Process connection	:	1/2" NPT (F) x 2 Nos.
Stem	:	Conical metal tip
Max. working pressure	:	413.7 bar (6000 psi)
Max. working temperature	:	240°C
"T" bar handle	:	AISI 304 SS
Drain port	:	1/4" NPT (F) x 2 Nos, plugged

DIMENSIONAL DRAWING


Remote mount - Pattern 1

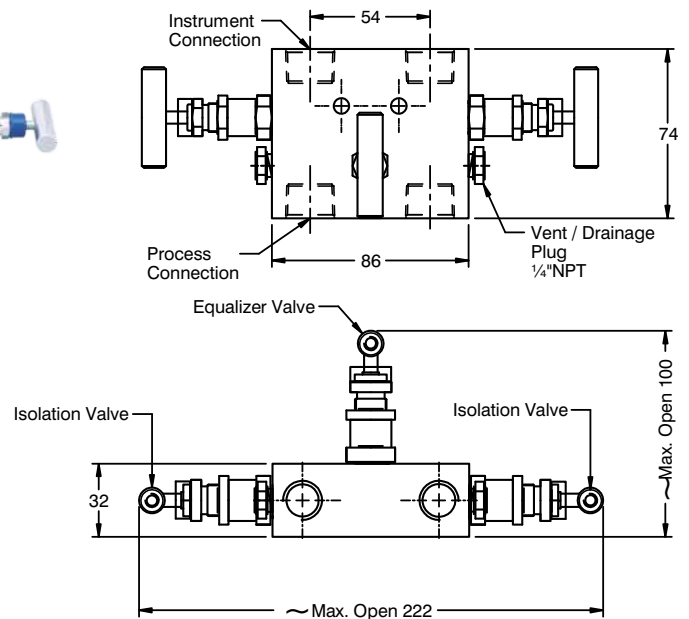

All dimensions are in mm.


DIMENSIONAL DRAWING

Remote mount - Pattern 2

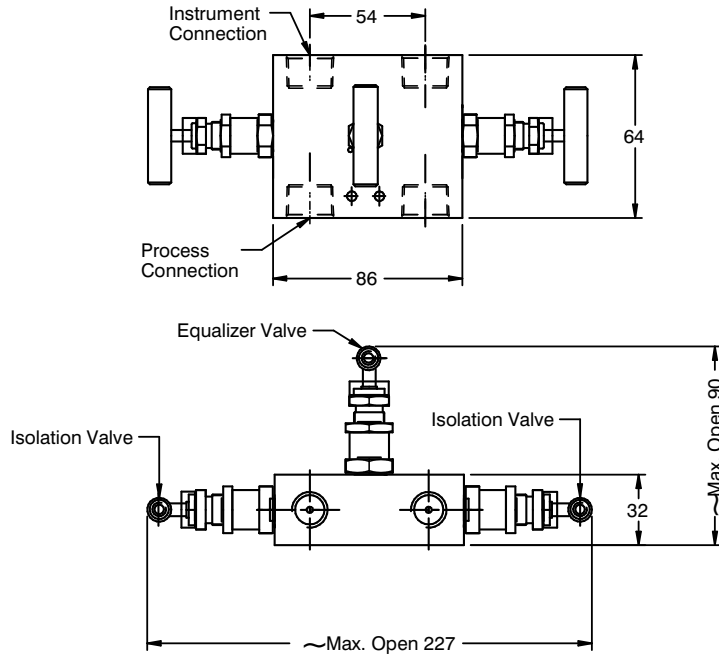


Note : The model comes without drain plugs.

Remote mount - Pattern 3

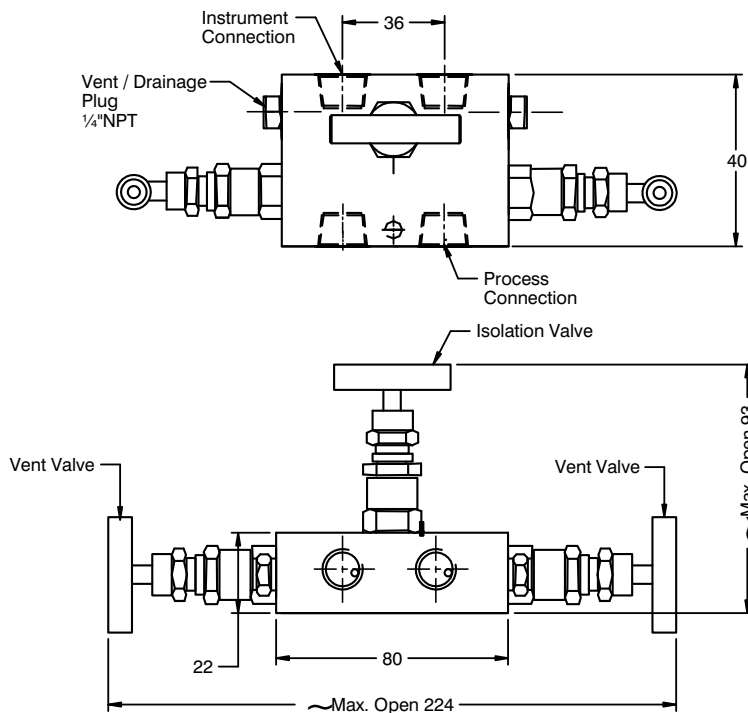



DIMENSIONAL DRAWING

Remote mount - Pattern 4

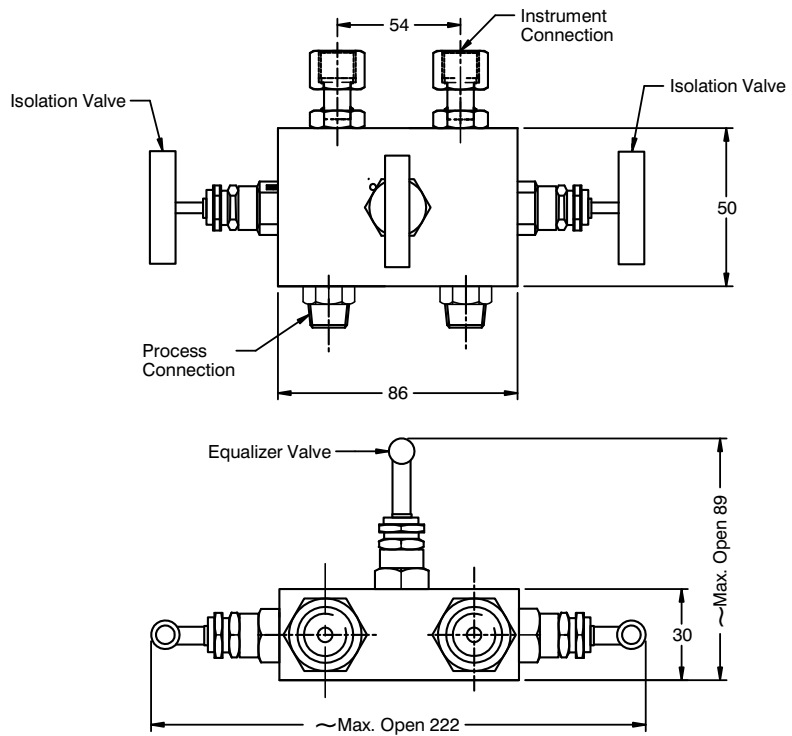


Note : The model comes without drain plugs.

Remote mount - Pattern 5

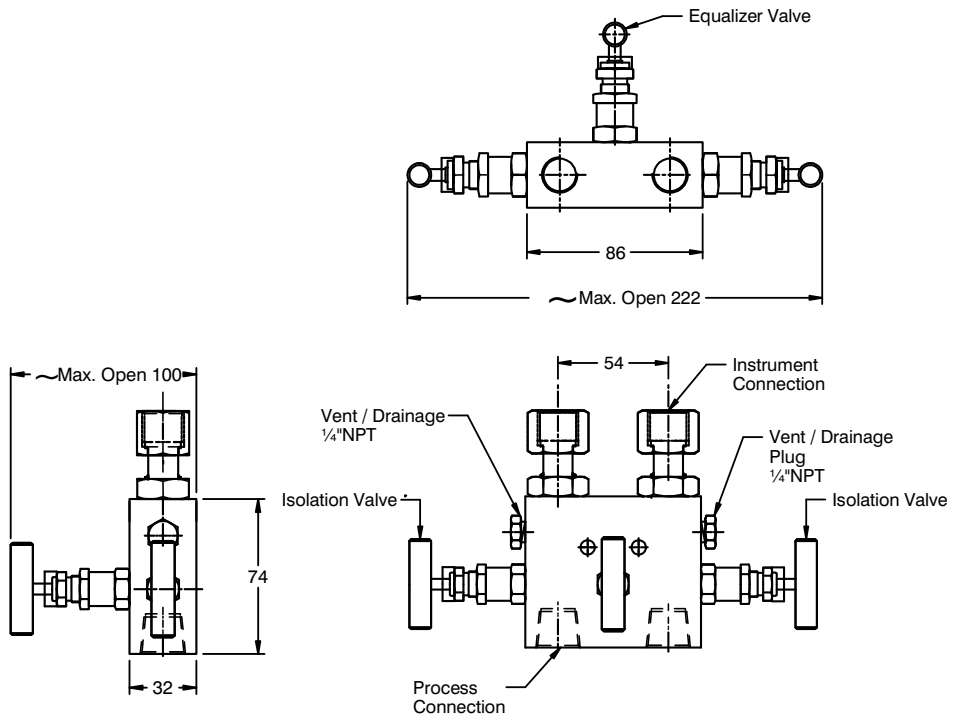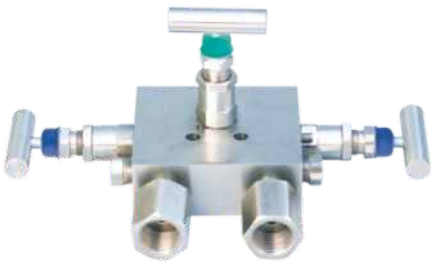


DIMENSIONAL DRAWING

Direct mount - Pattern 1


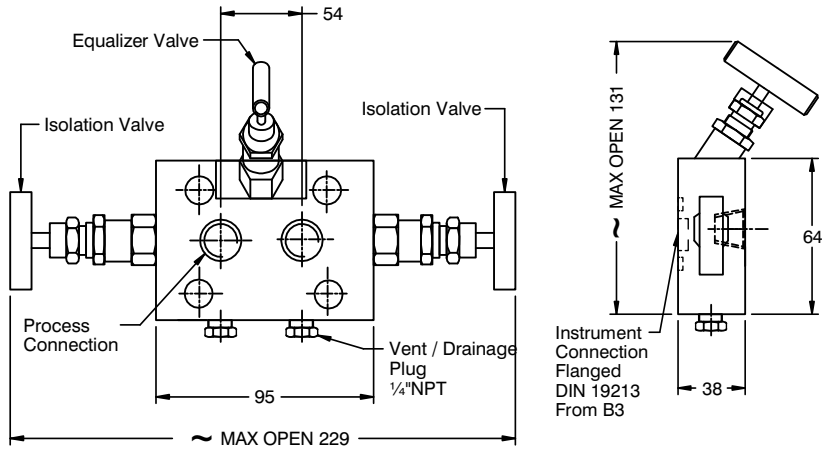


Direct mount - Pattern 2

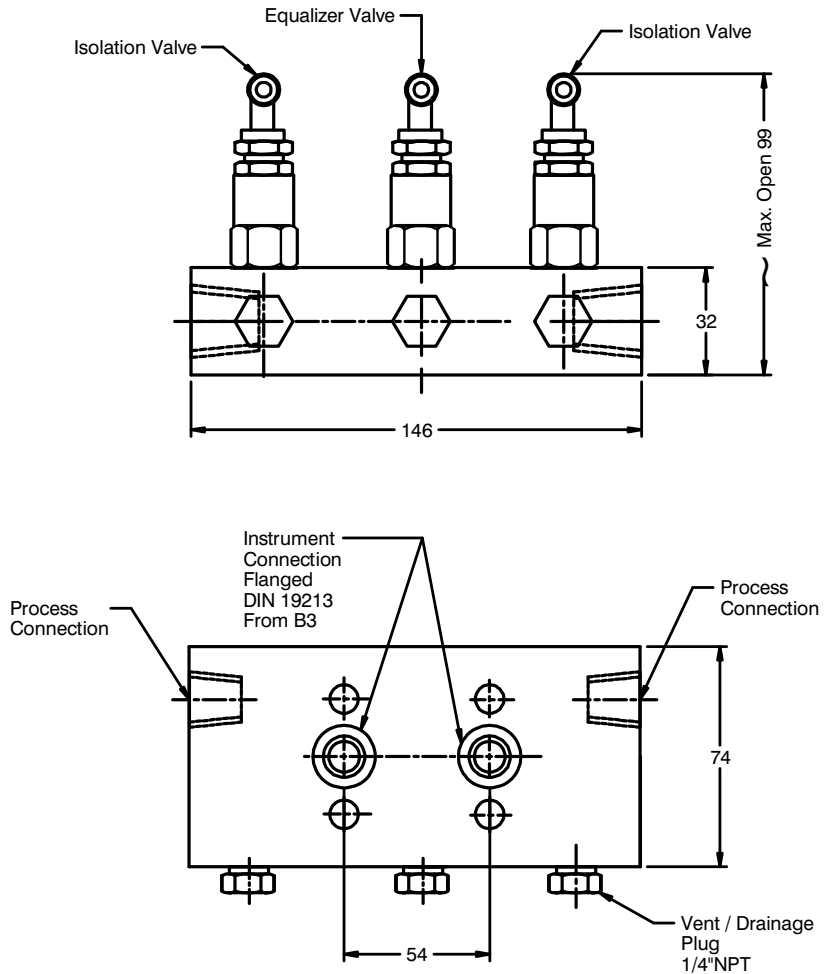


DIMENSIONAL DRAWING


Direct mount - Pattern 3

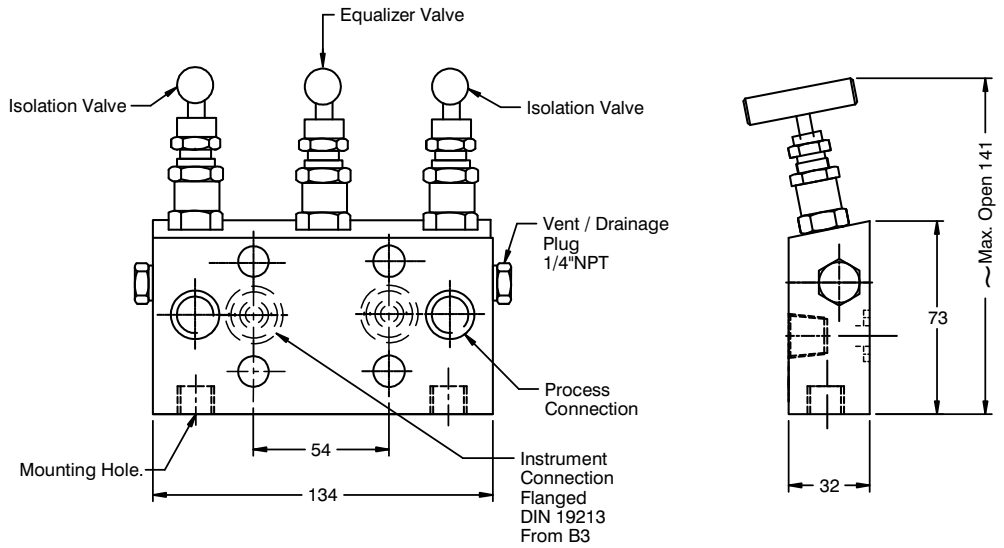

Direct mount - Pattern 4

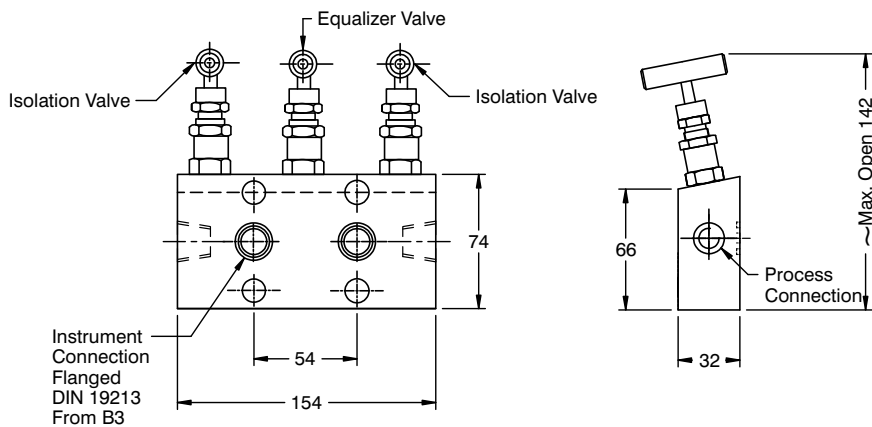


Direct mount - Pattern 5

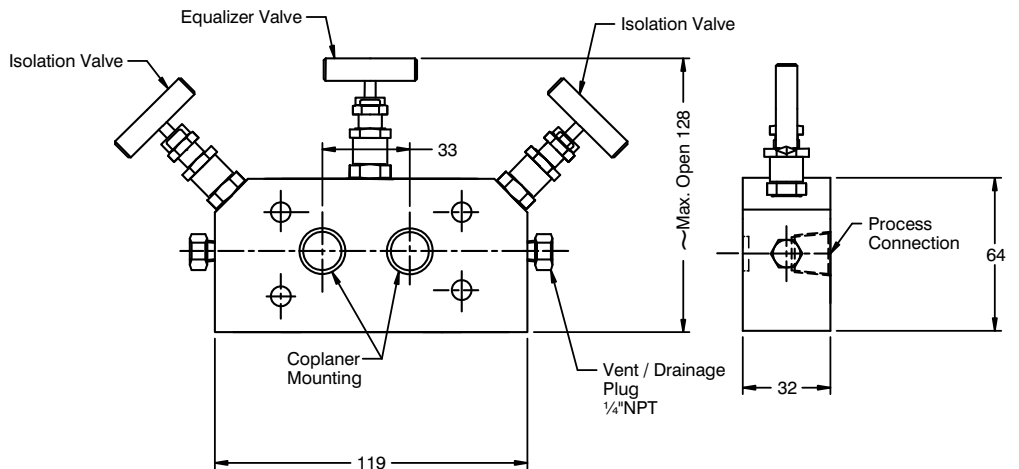


All dimensions are in mm.

DIMENSIONAL DRAWING

Direct mount - Pattern 6

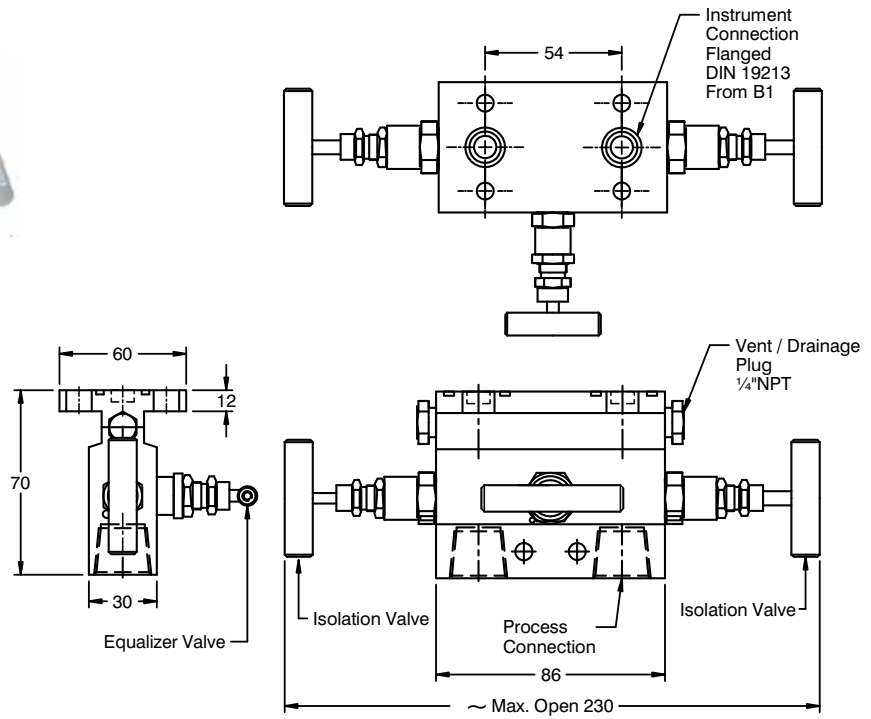




Direct mount - Pattern 7

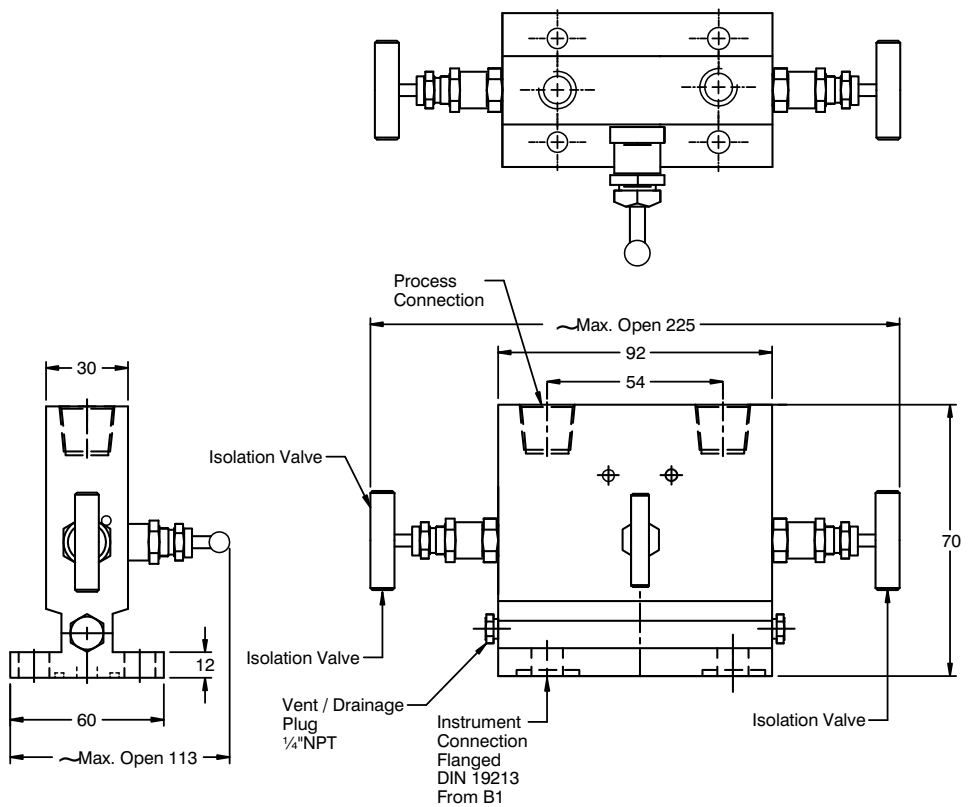

All dimensions are in mm.

DIMENSIONAL DRAWING

Direct mount - Pattern 8

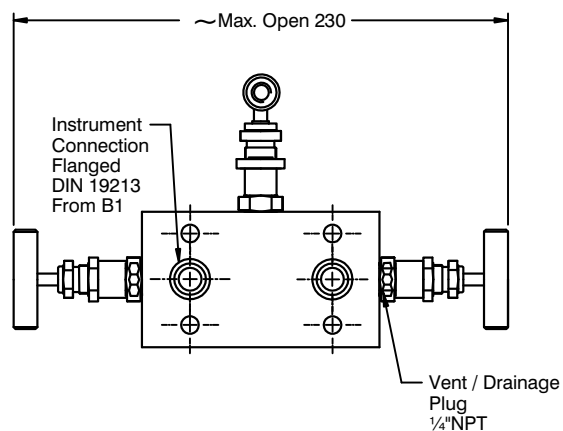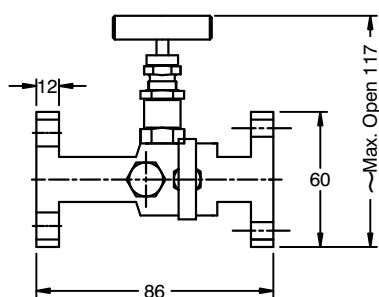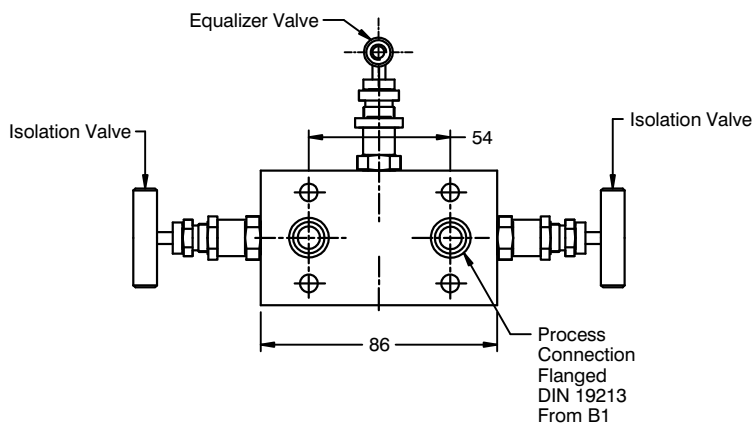

APPLICABLE ACCESSORIES

A502	Mounting Bracket, three/five valve manifold
A506	Mounting bolts
A507	Ring for flanged seal
A508	Sealing gasket

ORDERING CODES

1. MOUNTING

D Direct
R Remote

R

2. TYPE

1 Pattern 1	2 Pattern 2
3 Pattern 3	4 Pattern 4
5 Pattern 5	6 Pattern 6
7 Pattern 7	8 Pattern 8

2

3. WETTED PARTS

MB Carbon Steel / ASTM A105
MC AISI 304 SS
MF AISI 316 SS
MG AISI 316L SS
MM Monel 400
MN Monel K-500
MO Hastelloy C-276

MF

4. INSTRUMENT CONNECTION

11N 1/8" NPT (M)
12N 1/4" NPT (M)
13N 3/8" NPT (M)
14N 1/2" NPT (M)
11B 1/8" BSP (M)
12B 1/4" BSP (M)
13B 3/8" BSP (M)
14B 1/2" BSP (M)
01N 1/8" NPT (F)
02N 1/4" NPT (F)
03N 3/8" NPT (F)
04N 1/2" NPT (F)
01B 1/8" BSP (F)
02B 1/4" BSP (F)
03B 3/8" BSP (F)
04B 1/2" BSP (F)
FL5 Flange (DIN 19213 Form B1)
CL5 Coplanar (DIN 19213 Form B2)
FL6 Flange (DIN 19213 Form B3)

04N

5. STEM PACKING

P PTFE
G Grafoil

P

6. PROCESS CONNECTION

11N 1/8" NPT (M)
12N 1/4" NPT (M)
13N 3/8" NPT (M)
14N 1/2" NPT (M)
11B 1/8" BSP (M)
12B 1/4" BSP (M)
13B 3/8" BSP (M)
14B 1/2" BSP (M)
01N 1/8" NPT (F)
02N 1/4" NPT (F)
03N 3/8" NPT (F)
04N 1/2" NPT (F)
01B 1/8" BSP (F)
02B 1/4" BSP (F)
03B 3/8" BSP (F)
04B 1/2" BSP (F)
1SW 1/8" Socket-Weld
2SW 1/4" Socket-Weld
4SW 1/2" Socket-Weld
5SW 3/4" Socket-Weld

04N

7. OTHER OPTIONS

XY Circular Handle
TN Tested to NACE standards
TO Certification for Oxygen service
TM Material test certificate 2.2
TH Hydro test certificate
TC Material test certificate 3.1
XL Marking by laser

XL

Ordering Example : M103-R-2-MF-04N-P-04N-XL

NOTES:

1. Other connections are available, please contact factory for details.
2. Valve stem dust covers shall be identified with color codes according to their function as Blue = ISOLATE, Green = EQUALIZE & Red = DRAIN / VENT.
3. For option "F5 = Flange (DIN 19213 Form B1)", the CC distance shall be 54 mm.