


FEATURES

- 1 isolate & 1 vent valves

APPLICATION

- Isolation & venting of gauges, switches & transmitters
- High pressure line shut off
- Liquid & gas services

Direct / Remote Mounting

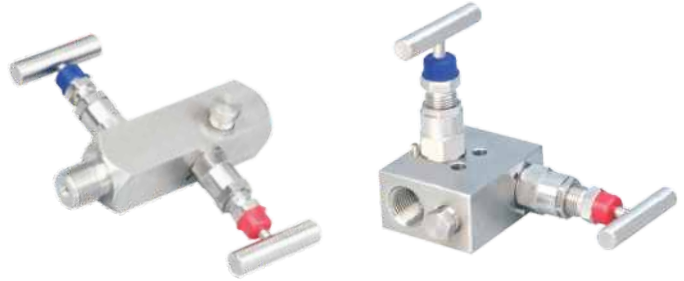



STANDARD SPECIFICATIONS

Mounting	:	Remote
Pattern	:	2
Wetted parts	:	AISI 316 SS
Instrument connection	:	1/2" NPT (F)
Stem packing	:	PTFE
Process connection	:	1/2" NPT (M)
Stem	:	Conical metal tip
Max. working pressure	:	413.7 bar (6000 psi)
Max. working temperature	:	240°C
"T" bar handle	:	AISI 304 SS
Drain port	:	1/4" NPT (F), plugged

DIMENSIONAL DRAWING




Remote mount - Pattern 1

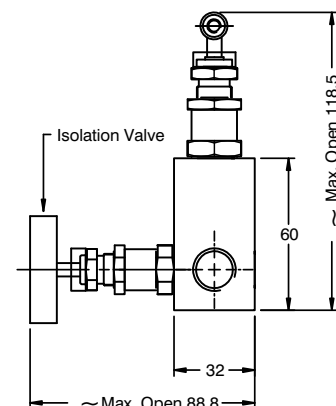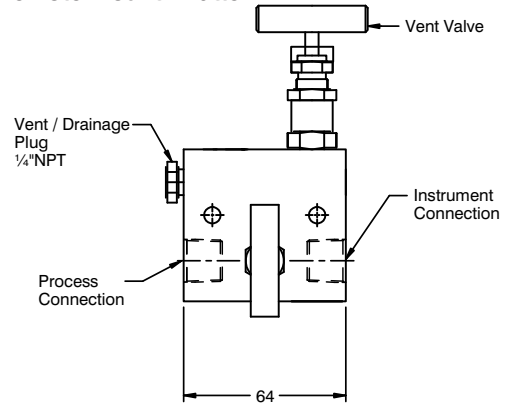


All dimensions are in mm.

DIMENSIONAL DRAWING


Remote mount - Pattern 2

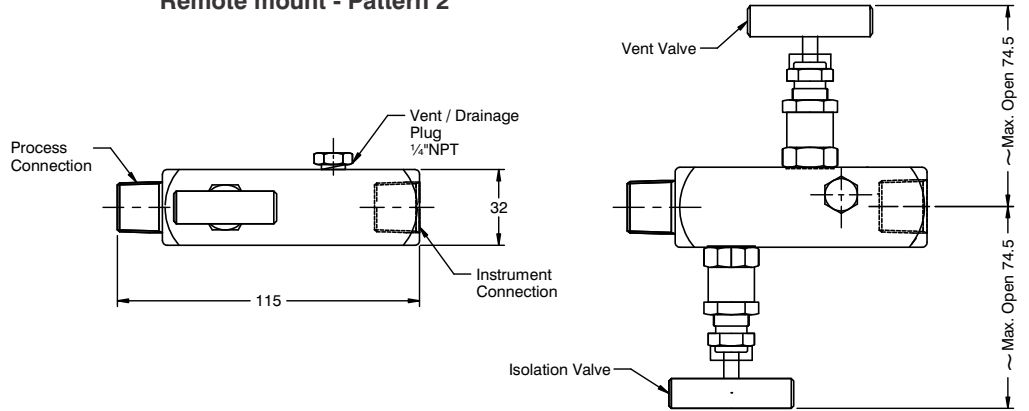

Remote mount - Pattern 3

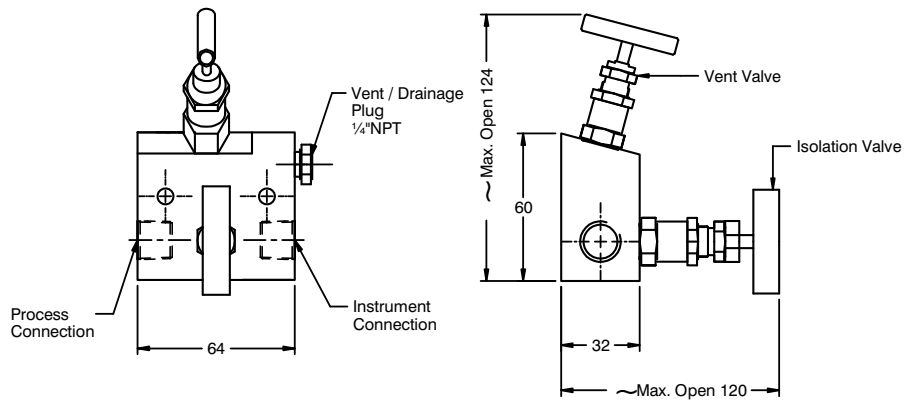


Remote mount - Pattern 4

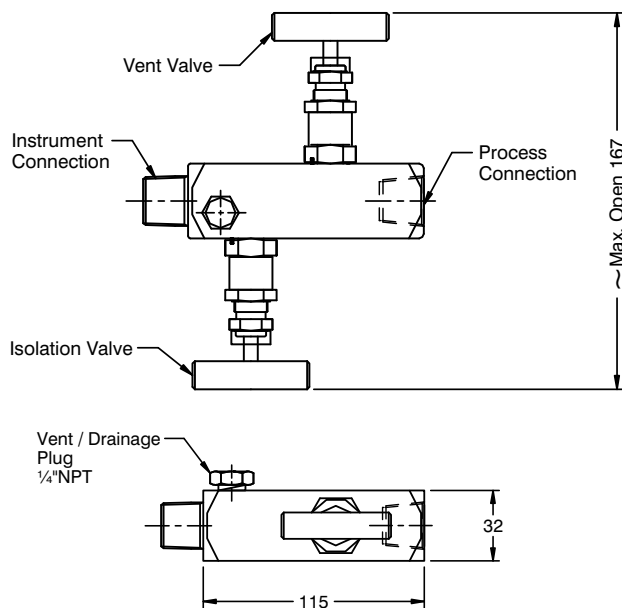



All dimensions are in mm.

DIMENSIONAL DRAWING


Remote mount - Pattern 5

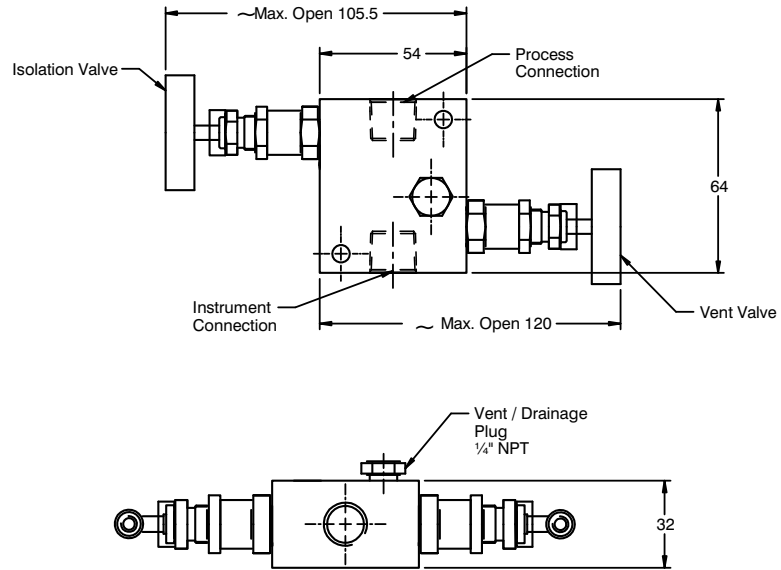

Remote mount - Pattern 6

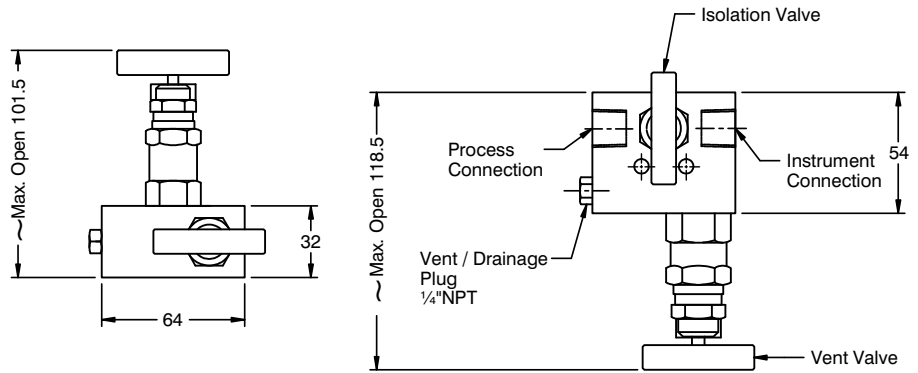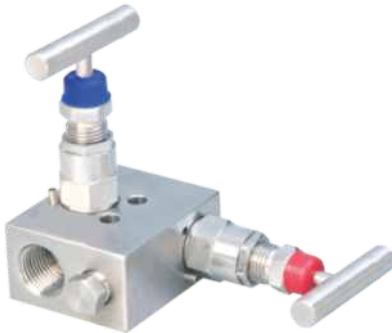


Remote mount - Pattern 7

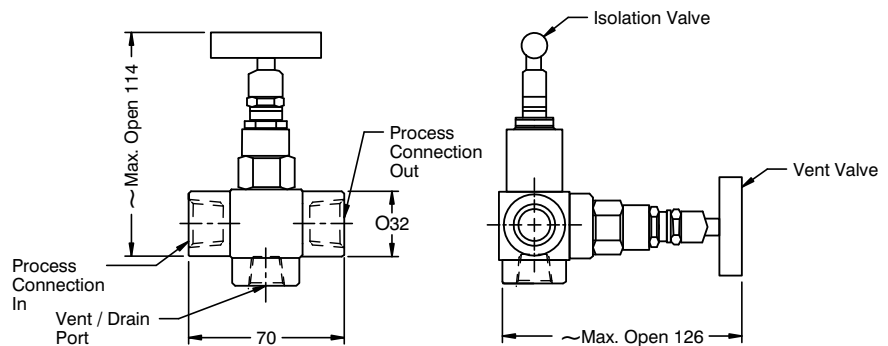


All dimensions are in mm.

DIMENSIONAL DRAWING


Direct mount - Pattern 1

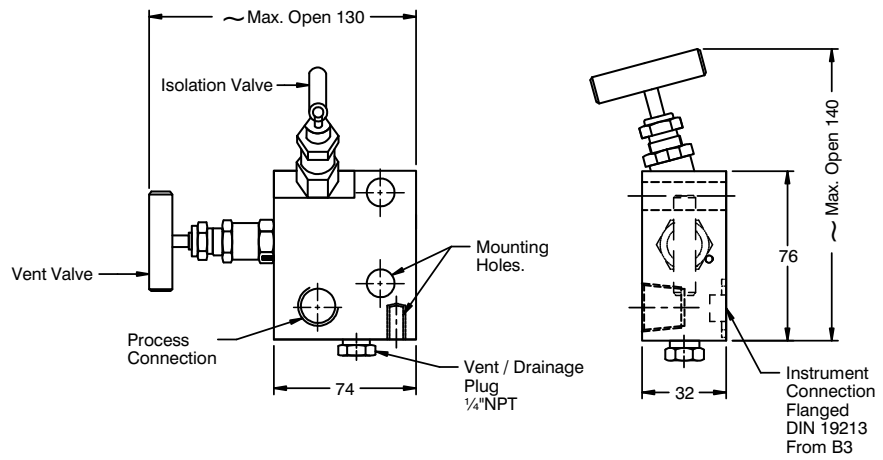

Direct mount - Pattern 2

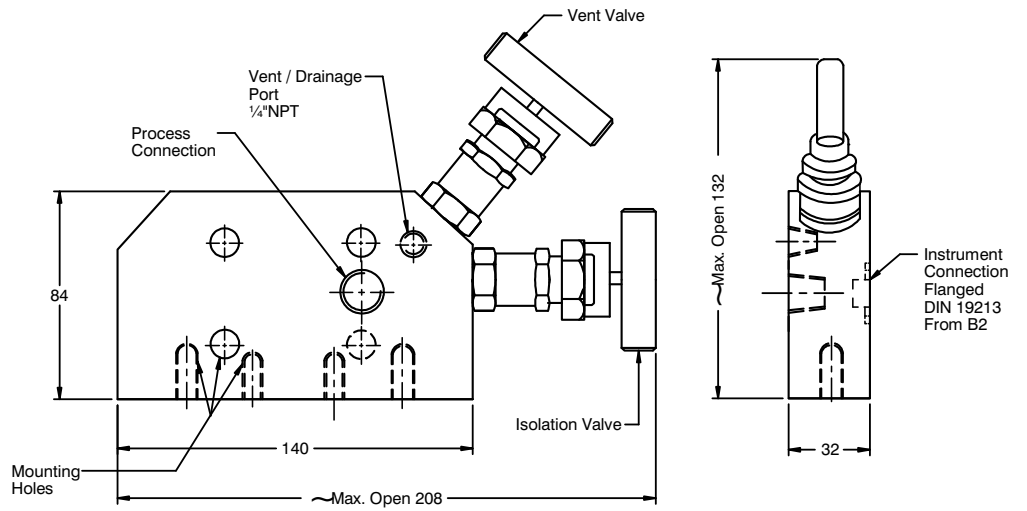

Direct mount - Pattern 3

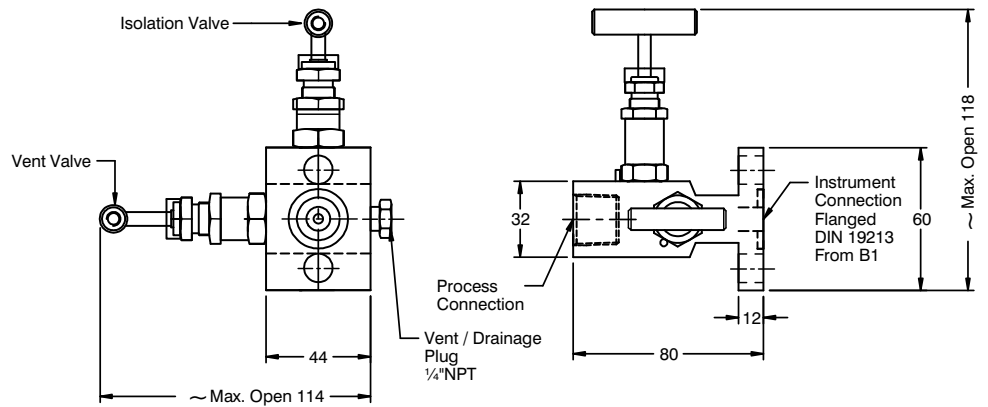


All dimensions are in mm.

DIMENSIONAL DRAWING



Direct mount - Pattern 4

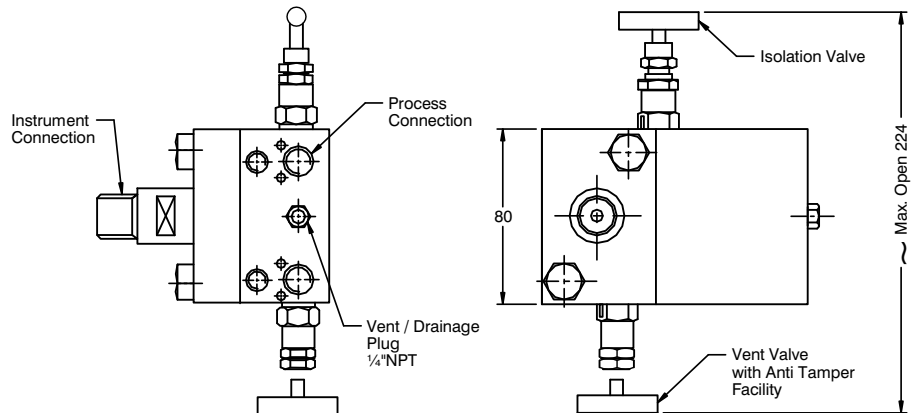

All dimensions are in mm.

ORDERING CODES

1. MOUNTING

D Direct	R Remote
-----------------	-----------------

2. TYPE

1 Pattern 1	2 Pattern 2
3 Pattern 3	4 Pattern 4
5 Pattern 5	6 Pattern 6
7 Pattern 7	

3. WETTED PARTS

MB Carbon Steel / ASTM A105	MF AISI 316 SS
MC AISI 304SS	MM Monel 400
MG AISI 316L SS	MO Hastelloy C-276
MN Monel K-500	

4. INSTRUMENT CONNECTION

11N 1/8" NPT (M)	12N 1/4" NPT (M)
13N 3/8" NPT (M)	14N 1/2" NPT (M)
11B 1/8" BSP (M)	12B 1/4" BSP (M)
13B 3/8" BSP (M)	14B 1/2" BSP (M)
01N 1/8" NPT (F)	02N 1/4" NPT (F)
03N 3/8" NPT (F)	04N 1/2" NPT (F)
01B 1/8" BSP (F)	02B 1/4" BSP (F)
03B 3/8" BSP (F)	04B 1/2" BSP (F)
FL5 Flange (DIN 19213 Form B1)	
CL5 Coplanar (DIN 19213 Form B2)	
FL6 Flange (DIN 19213 Form B3)	

5. STEM PACKING

P PTFE	G Grafoil
---------------	------------------

6. PROCESS CONNECTION

11N 1/8" NPT (M)	12N 1/4" NPT (M)
13N 3/8" NPT (M)	14N 1/2" NPT (M)
11B 1/8" BSP (M)	12B 1/4" BSP (M)
13B 3/8" BSP (M)	14B 1/2" BSP (M)
01N 1/8" NPT (F)	02N 1/4" NPT (F)
03N 3/8" NPT (F)	04N 1/2" NPT (F)
01B 1/8" BSP (F)	02B 1/4" BSP (F)
03B 3/8" BSP (F)	04B 1/2" BSP (F)
1SW 1/8" Socket-Weld	
2SW 1/4" Socket-Weld	
4SW 1/2" Socket-Weld	
5SW 3/4" Socket-Weld	

7. OTHER OPTIONS

XY Circular Handle
TN Tested to NACE standards
TO Certification for Oxygen service
TM Material test certificate 2.2
TH Hydro test certificate
TC Material test certificate 3.1
XR Customized Marking
XL Marking by laser

Ordering Example : **M102-R-2-MF-04N-P-14N-XL**

APPLICABLE ACCESSORIES

A501 Mounting Bracket, two valve manifold	A506 Mounting bolts
A507 Ring for flanged seal	A508 Sealing gasket

NOTES:

1. Other connections are available, please contact factory for details.
2. Valve stem dust covers shall be identified with color codes according to their function as Blue = ISOLATE, Green = EQUALIZE & Red = DRAIN / VENT.
3. For option "F5 = Flange (DIN 19213 Form B1)", the CC distance shall be 54 mm.